



Models 1030 & 1230 “X” Series Modular Cubers




Model 1230 shown

Features

- High production capability
- Environmentally safe Future Proof™ Refrigerant R-404a
- 100% front serviceability
- Programmable water control
- Compact design – only 76 cm wide
- All stainless steel panels & frame
- Self-Insulating ABS evaporator housing
- Split compartment design
- Quick-change merchandising panel
- Microban® antimicrobial product protection inhibits bacteria, mold and mildew
- Extreme energy efficiency – low power consumption, low water usage and low total energy cost
- Most consistent harvest control in the market



Quick-change, merchandising panel provides space for consumer-targeted promotional messages.

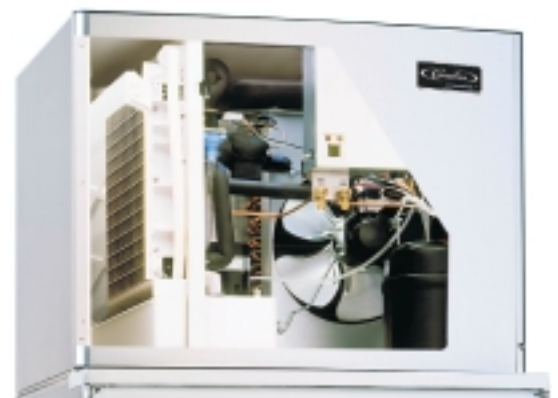

Key components have been reinforced to provide years of durable service. Front serviceability ensures easy access to components.



1030 & 1230 "X" Series

Technical Specifications



Cube size: 16 mm W x 22 mm H x 22 mm D

Ambient temp.: 10°C - 38°C

Water temp.: 7°C - 32°C

Water pressure: 138 - 552 kPa



Maximum fuse size: 20

Circuit amp: 20

Refrigerant type: R-404a

Graphic dimensions: 727 mm W x 573 mm H

Agency listings:

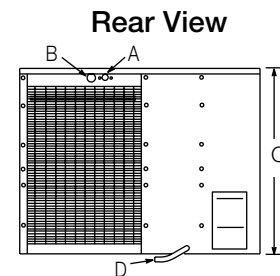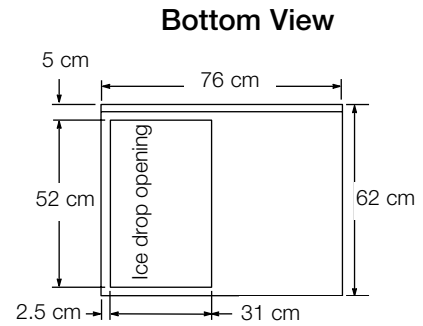

- A Potable water inlet .95 cm male flare
- B Electrical service opening 2.2 cm water and air cooled
- C Dump valve drain hose 1.4 cm I.D. by 1.91 cm O.D.
- D Model 1030 64 cm, Model 1230 71 cm

Model 1030 recommended storage bins:

B842 P/SS* – 263 kg capacity, B1048 P/SS* – 304 kg capacity

* Adapter required Rated in accordance with ARI Standard 820-88

Model 1230 recommended storage bins:

B842 P/SS* – 263 kg capacity, B1048 P/SS* – 304 kg capacity

* Adapter required Rated in accordance with ARI Standard 820-88

1030 AIR-COOLED PRODUCTION CHART			
AIR TEMPERATURE	WATER TEMPERATURE		
	10°C	21°C	27°C
10°C	358 kg	340 kg	335 kg
21°C	355 kg	330 kg	314 kg
32°C	318 kg	301 kg	281 kg

1230 AIR-COOLED PRODUCTION CHART			
AIR TEMPERATURE	WATER TEMPERATURE		
	10°C	21°C	27°C
10°C	417 kg	398 kg	372 kg
21°C	408 kg	382 kg	361 kg
32°C	406 kg	369 kg	350 kg



IMI Cornelius Australia Pty Ltd
260 Horsley Road
Milperra, NSW, 2213
Australia