



# Models 322, 330, 522 & 530 “X” Series

Modular Cubers

## Features

- High production capability
- Environmentally safe Future Proof™ Refrigerant R-404a
- 100% front serviceability
- Programmable water control
- Compact design – Models 322 and 522 are only 56 cm wide, and 330 and 530 are 76 cm wide
- All stainless steel panels & frame
- Self-Insulating ABS evaporator housing
- Split compartment design
- Quick-change merchandising panel
- Microban® antimicrobial product protection inhibits bacteria, mold and mildew
- Extreme energy efficiency – low power consumption, low water usage and low total energy cost
- Most consistent harvest control in the market




Model 330 and 530 shown



Model 322 and 522 shown



Quick-change, merchandising panel provides space for consumer-targeted promotional messages.

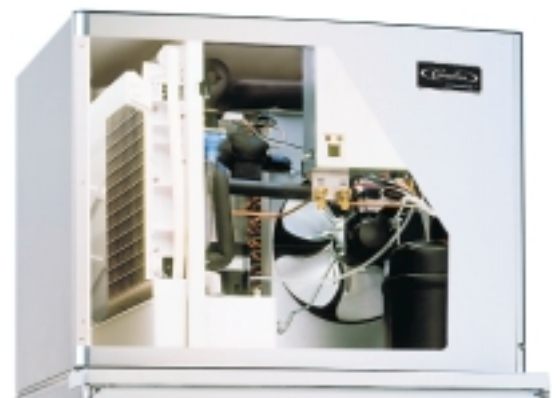

Key components have been reinforced to provide years of durable service. Front serviceability ensures easy access to components.



# 322, 330, 522 & 530 "X" Series

## Technical Specifications



**Cube size:** 16 mm W x 22 mm H x 22 mm D

**Ambient temp.:** 10°C - 38°C

**Water temp.:** 7°C - 32°C

**Water pressure:** 138 - 552 kPa

**Maximum fuse size:** 20

**Circuit amp:** 322/330 10amp, 522/530 15amp

**Refrigerant type:** R-404a

**Graphic dimensions:** 727 mm W x 573 mm H

**Agency listings:**



**Model 322 recommended storage bins:**

B322AP – 118 kg capacity, B430AP\* – 132 kg capacity,  
B530AP\* – 163 kg capacity, B530SS\* – 181 kg capacity

\* Adapter Required Rated in accordance with ARI Standard 820-88

**Model 330 recommended storage bins:**

B322AP – 127 kg capacity, B430AP – 132 kg capacity,  
B530AP – 163 kg capacity, B530SS – 181 kg capacity

Rated in accordance with ARI Standard 820-88

**Model 522 recommended storage bins:**

B322AP – 127 kg capacity, B430AP\* – 132 kg capacity,  
B530AP\* – 163 kg capacity, B530SS\* – 181 kg capacity


\* Adapter Required Rated in accordance with ARI Standard 820-88

**Model 530 recommended storage bins:**


B322AP – 127 kg capacity, B430AP – 132 kg capacity,  
B530AP – 163 kg capacity, B530SS – 181 kg capacity.

Rated in accordance with ARI Standard 820-88


**Bottom View 322 and 522**

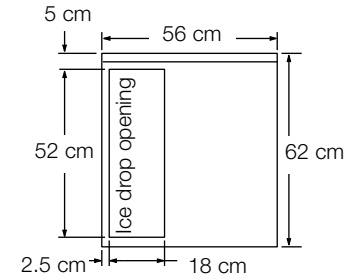

**Bottom View 330 and 530**

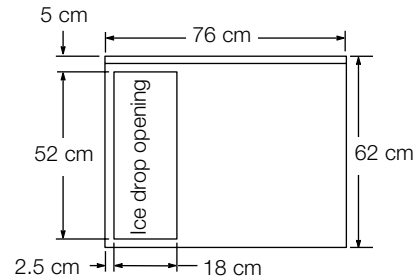

**Rear View**

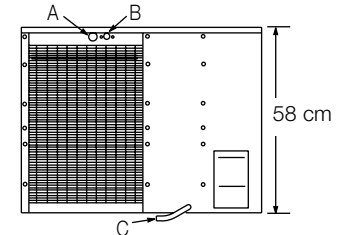

- A Electrical service opening 2.2 cm male flare
- B Potable water inlet .95 cm I.D. by 1.91 cm O.D.
- C Dump valve drain hose 1.4 cm I.D. by 1.91 cm O.D.

322 AIR-COOLED PRODUCTION CHART			
AIR TEMPERATURE	WATER TEMPERATURE		
	10°C	21°C	27°C
10°C	129 kg	123 kg	118 kg
21°C	127 kg	117 kg	115 kg
32°C	103 kg	101 kg	97 kg

522 AIR-COOLED PRODUCTION CHART			
AIR TEMPERATURE	WATER TEMPERATURE		
	10°C	21°C	27°C
10°C	226 kg	214 kg	204 kg
21°C	225 kg	207 kg	202 kg
32°C	193 kg	177 kg	171 kg

330 AIR-COOLED PRODUCTION CHART			
AIR TEMPERATURE	WATER TEMPERATURE		
	10°C	21°C	27°C
10°C	129 kg	123 kg	118 kg
21°C	127 kg	117 kg	115 kg
32°C	103 kg	101 kg	97 kg

530 AIR-COOLED PRODUCTION CHART			
AIR TEMPERATURE	WATER TEMPERATURE		
	10°C	21°C	27°C
10°C	226 kg	214 kg	204 kg
21°C	225 kg	207 kg	202 kg
32°C	193 kg	177 kg	171 kg



IMI Cornelius Australia Pty Ltd  
260 Horsley Road  
Milperra, NSW, 2213  
Australia